

# LED Backlit Down Light

Premium Version



Tri-color



## Features

- > Own designed steel case as heat sink
- > High technology SMD2835 as light source
- > IP40 / Tp(a) is available
- > 3 years warranty

## Applications

- > Commercial Lighting:
  - Shopping mall, Super-market, Hotel, Office
- > Public Lighting:
  - Path way , Stations , School, Library

## Options


- > Fire Rating :
  - HB / TP(a) / TP(b)
- > IP Rating:
  - IP20 / IP40
- > Function:
  - ON-OFF / I-10V / Micro-wave sensor
- > LED Driver :
  - Tridonic / Osram / Lifud / Boke
- > Emitting Color:
  - Single OR Tri-color
- > Package : Standard or color box

Data Sheet

Product Name	Rated Power	Lumen Output	Lumen Efficiency	Color Index	AC Input	Power Factor	Flicker Free
3"-6W Premium Backlit DL	6W	600LM	100LM/W	Ra>80	AC200-240V	PF>0.95	Y
3.5"-8W Premium Backlit DL	8W	800LM	100LM/W	Ra>80	AC200-240V	PF>0.95	Y
4"-10W Premium Backlit DL	10W	1000LM	100LM/W	Ra>80	AC200-240V	PF>0.95	Y
5"-12W Premium Backlit DL	12W	1200LM	100LM/W	Ra>80	AC200-240V	PF>0.95	Y
6"-15W Premium Backlit DL	15W	1500LM	100LM/W	Ra>80	AC200-240V	PF>0.95	Y
8"-18W Premium Backlit DL	18W	1800LM	100LM/W	Ra>80	AC200-240V	PF>0.95	Y
10"-22W Premium Backlit DL	22W	2200LM	100LM/W	Ra>80	AC200-240V	PF>0.95	Y



Dimensions

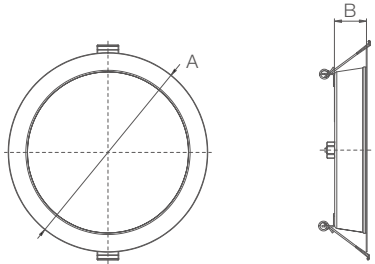

Product Name	A	B	Hole Size
3" Down Light	Ø120	27	95-100
3.5" Down Light	Ø130	27	105-110
4" Down Light	Ø150	27	125-130
5" Down Light	Ø170	27	145-150
6" Down Light	Ø190	27	165-170
8" Down Light	Ø230	27	205-210
10" Down Light	Ø280	27	255-260

Unit: mm

Beam Angle

